

Rail-DIN Power Supply

85 to 264 Vac / 12 Vdc – 3.5 A (42 W)

Rev. 29/09/2006


Order Code : 0476414500

This power supply in Rail-DIN case, allows to supply several devices at 12 Vdc.
It has screw connections and is compatible with the **GenIndus / Gen44i / Fastrack** modems.

Description :

42 Watts switcher regulated external power supply
Fixing on symmetrical Rail-DIN – plastic protection cover.
Connection with screw connections.
A green LED indicates the power supply presence.

Input Tension	85 to 264 VAC or 120 to 370 VDC
AC Input Frequency	47 to 63 Hz
DC Output Tension	12 Vdc adjustable +/- 10% 3,5A
Tolerance	+/- 1%
Wave and noise (R&N)	200 mV pp
Efficiency	77%
Protections	Against overvoltages and short-circuits
Safety standards	Reference to : EN60950 / UL508 / TUV / Class 1
Norme EMC	According to class EN55022 B / EN61000-3-2,3 / EN61000-4-2,3,4,5,6,8,11 / ENV50204
Operating Temperatures	-10°C to + 45°C
Connections	3 pin screw connection for AC/DC input and 2 x 2 pin for 12Vdc output
Dimensions	L= 78mm , h = 93mm, p = 67mm
Weight	400 gr

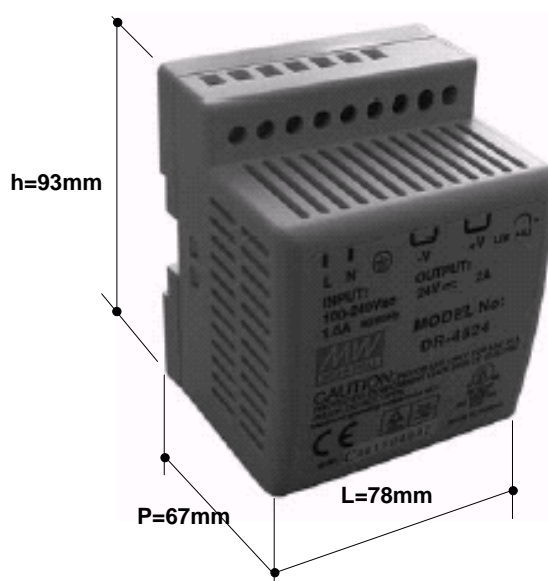

ERCO & GENER SA may at any time and without notice make changes and improvements to the products and services offered